



OPTIONAL FUSIBLE LINK OPERATION

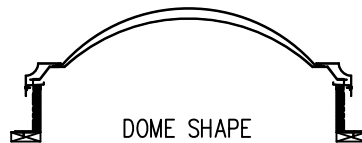

DOMESHAPE



ORDER #: \_\_\_\_\_ DATE: \_\_\_\_\_

PROJECT: \_\_\_\_\_

LOCATION: \_\_\_\_\_

CUSTOMER: \_\_\_\_\_

APPROVED: \_\_\_\_\_ DATE: \_\_\_\_\_

MODEL	R.O. OF CURB	QUANTITY
5555	48" X 48"	
5566	48" X 60"	
5578	48" X 72"	
5596	48" X 90"	
55102	48" X 96"	
6666	60" X 60"	
6678	60" X 72"	
6696	60" X 90"	
66102	60" X 96"	

FRAME & RETAINING ANGLE FINISH: MILL (STANDARD)  
 OTHER \_\_\_\_\_

CURB WALLS: WHITE INNER / MILL OUTER (STANDARD)

ACRYLIC GLAZING:

OUTER	INNER
CLEAR	CLEAR
#2412 BRONZE	#2447 WHITE

CAUTION: WHEN INSTALLING THIS PRODUCT THE AREA BELOW THE UNIT MUST BE CLEAR OF OBSTRUCTIONS WHICH COULD IMPEDE THE RELEASE OF THE DOMES.



AUTOMATICALLY OPERATED ROOF VENT  
 4LM7 ROOF CLASS 90  
 INSTALLED ON A MINIMUM 9" HIGH CURB  
 UL LISTED UNITS ARE DESIGNED TO DROP  
 OUT IN LESS THAN 5 MINUTES AT 500°F  
 WHEN SUBJECTED TO THE STANDARD UL  
 793 FIRE EXPOSURE TEST.

CSO DECK MOUNT SHRINK-OUT SMOKE VENT